


**MACCHINE SPECIALI SRL**

Via Remo Brambilla n. 2  
20863 Concorezzo (MB)  
Milano - Italy  
Tel. ++ 39 039 6040490  
Fax ++ 39 039 6049961  
E-mail: [macchinespeciali@macchinespeciali.it](mailto:macchinespeciali@macchinespeciali.it)  
Internet: <http://www.macchinespeciali.it>

rif. 3.3000.1



## PRETWISTER TYPE " 3000/16"

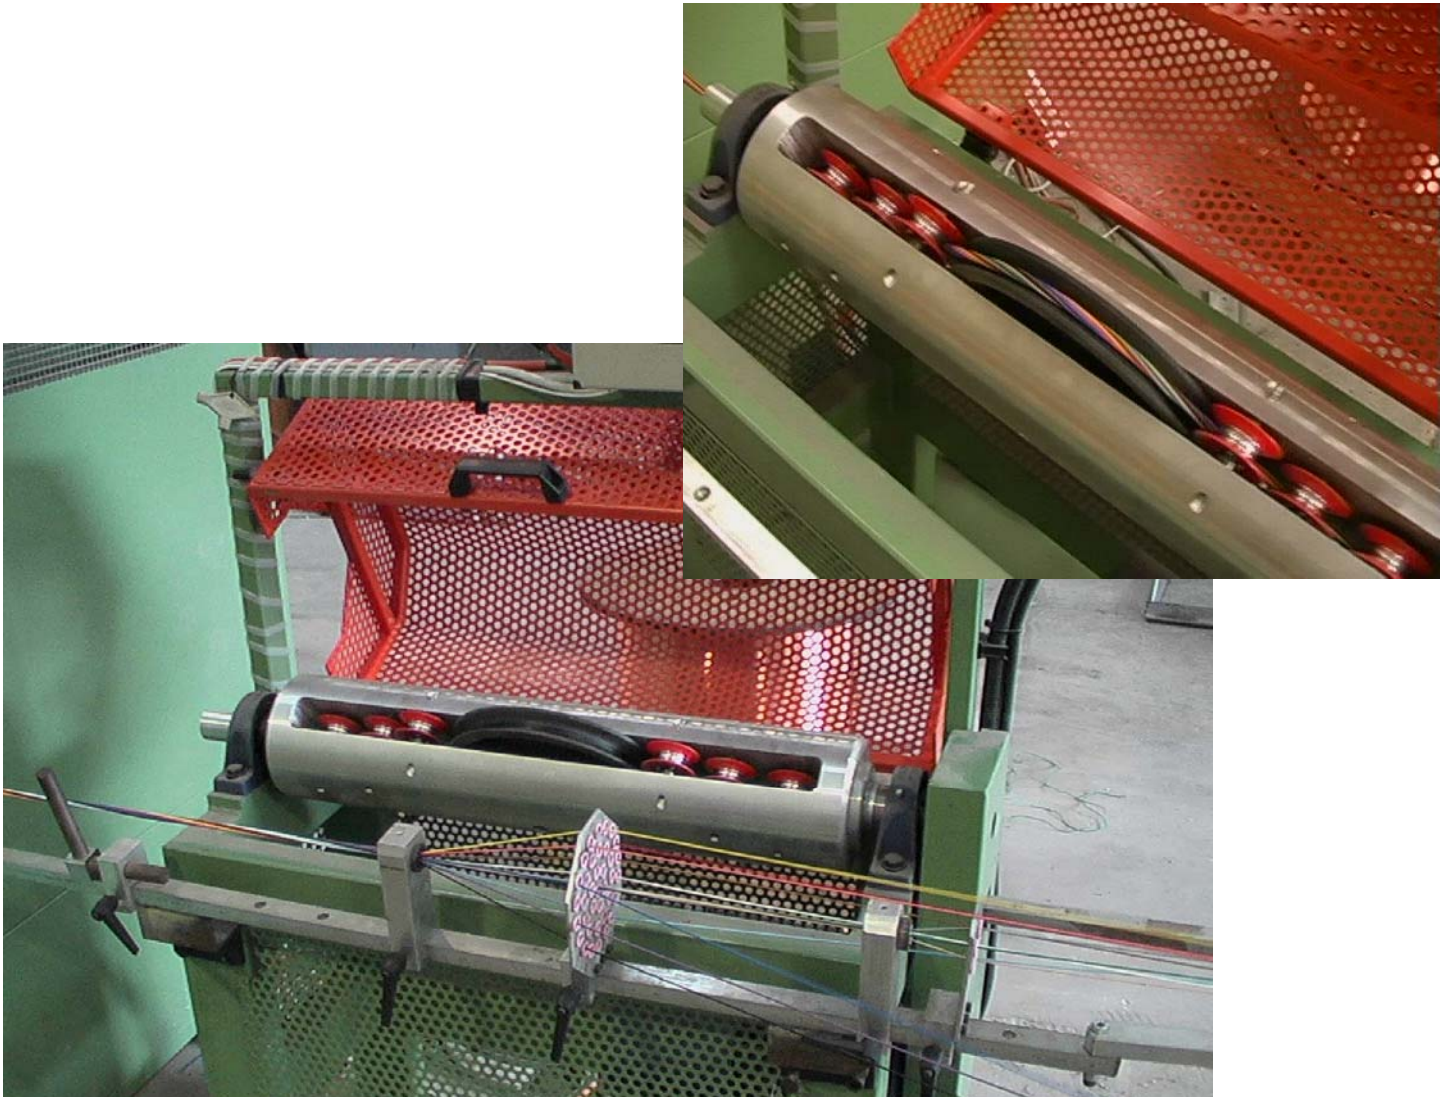

- SPEED OF ROTATION MAX. 3000 Twist/min.
- BRAKING ON CORES MADE BY PAY-OFFS
- MAX. DIAMETER OF CABLE 16 mm
- THE PRE-TWISTING SYSTEM IS SUITABLE TO WORK IN TANDEM WITH DOUBLE TWIST MACHINES
- THE PURPOSE OF PRE-TWISTER IS TO AVOID THE EXIT OF THE CENTRAL CORE ON THE LAY-UP OF CABLES AND STRANDS.
- SUITABLE ALSO FOR THE LAY-UP OF MULTIWIRE.
- THE PRE-TWISTER IS LINKED TO THE MACHINE , THEY RUN AT THE SAME TWISTS AND IN THE SAME SENSE OF STRANDING.
- THIS APPLICATION ALLOWS TO CABLE THE PRODUCT BEFORE ENTER IN THE MACHINE RECALLING THE RIGHT LENGHT OF THE SINGLE CORES. IN THIS WAY THE CENTRAL CORE, ON THE SECOND TWIST, WILL HAVE THE SAME LENGHT OF THE OTHER CORES.